


MIV Metal Vent Valve

Actual Picture

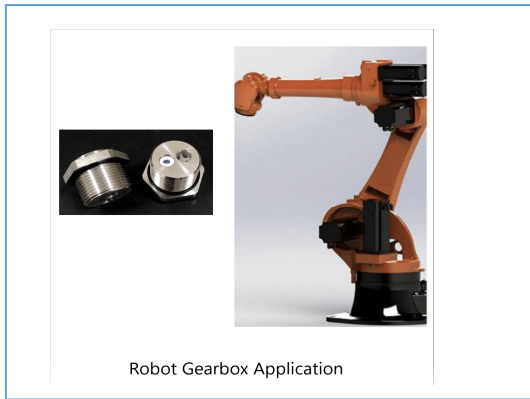


Performance:

- >Block ingress of wide range of contaminants,from rain and insects to dirt,dust,sand and other,particulates,
- >Even Open Valve still keep IP 68,IP69K protection class and -40°C to $+125^{\circ}\text{C}$
- >operating temp.range.Best to use under the tough environment.
- >Installing on the side face of enclosures is effective for outdoor use.
- >Breather plug with aluminum cover and specially-designed internal valve with an inox spring,calibrated from 0.05 to 0.10 bar, which opens at intervals to vent internal pressure created by fluid turbulence and keep out foreign bodies.

It is especially recommended for applications on Speed-shift Gears, Agricultural over-Gears and Industrial Speed-Reduction Gearboxes,a low pressure air supply system.

Dimensions

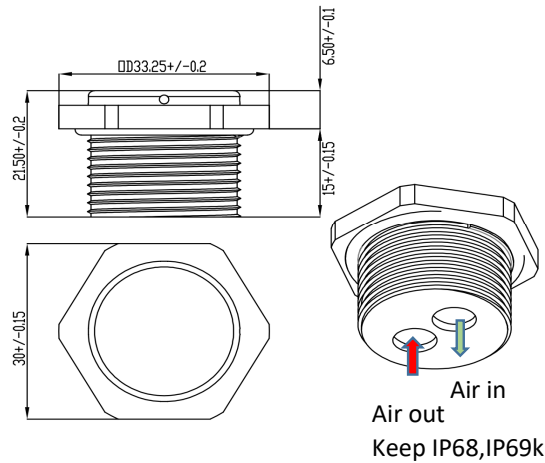

Part No.	Thread	d	h	f	e	Typical Open Valve	Enviromental performance
MIV-25MA-02WV	m25	33.25	21.5	15	30	10kpa	Airflow:>2L/min@10kpa IP66.IP67(Immersion:1meters/30min.) IP68,IP69k $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ 85%.85%humidity-1000 hours High temperature,Hail impact test.

Other sizes please check with us.We can OEM any sizes for you rapidly within 2weeks.

www.milvent.com; milvent@milvent.com

+8618218369198