



MIV SERIES

Ventilation Parts

MIV-CA VENTILATION CABLE GLAND With Bending



- >Maintain high airflow in large outdoor lighting or enclosure
- >Equalize pressure and reduce condensation by allowing air to flow freely into and out of sealed large enclosures.
- >Prevent lighting condensation.
- >IP68 protection class(2meters/60min.) and -40° C to +125° C operating temp.range.Best to use under the tough environment.
- >Reliably Protect sensitive electronics against water and other liquids.
- >Installing on the side face of enclosures is effective for outdoor use.

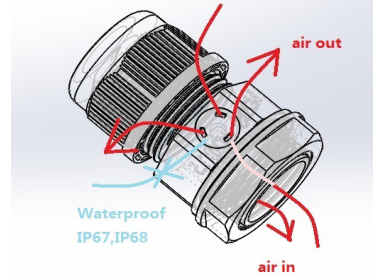

Technical Data

PART NO.	Typical airflow		25l/h(dp=70mbar)							
	Water entry pressure		0.2bar/30sec							
Recommended torque		5Nm								
Environmental performance		IEC529,2nd(Protection class):IP66,IP67,IP68(Immersion:2meters/60min.)IP69K IEC60068-2-1,2,14(Heat resistance):-40°C--+125°C IEC600-2-78(Humidity testing):85%.85%humidity-1000 hours IEC62108.10.8.9(Solor industry testing):Humidity freeze-High temperature.Hail impact test,UL94V-0(1)(Flame resistant)								
Size		Clamping Range		Thread		Spanner Width		Outer Ø D mm	max. Height H mm	l/h (dp=70mbar)
Thread Type METRIC acc. to EN 60423		For Cable OD	Thread OD	Thread Length TL mm	Wrench OD	SW Cap mm	SW Body mm			
MIV-CA12(Bending)	M12x1,5	3.5~8	12	10	18/19	18	19	21.5	30	
MIV-CA12-4P(Bending)		1.5~3/4 Pores)								
MIV-CAPG7(Bending)	PG7	3.5~8	12	10	18/19	18	19	21.5	30	
MIV-CAPG7-4P(Bending)		1.5~3/4 Pores)								
MIV-CA16(Bending)	M16x1,5	3.5~8	16	10	19/22	19	22	21.5	30	
MIV-CA16-4P(Bending)		1.5~3/4 Pores)		10	19/22	19		21.5	30	
MIV-CA16A(Bending)		5~10		10	22/22	22		21.5	30	
MIV-CA16A-HA(Bending)		5~10		10	22/22	22		21.5	30	
MIV-CAPG9(Bending)	PG9	3.5~8	16	10	19/22	19	22	21.5	30	
MIV-CAPG9-4P(Bending)		1.5~3/4 Pores)		10	19/22	19		21.5	30	
MIV-CAPG9-15(Bending)		5~10		15	22/22	22		21.5	30	
MIV-CA20(Bending)	M20x1,5	6~12	20	10	24/27	24	24	26.8	33	
MIV-CA20-15(Bending)	M20x1,5	6~12	20	15	24/27	24	24	26.8	33	
MIV-CAPG13.5(Bending)	PG13.5	6~12	20	15	24/27	24	24	26.8	33	
MIV-CAPG16(Bending)	PG16	7~14	22.5	11	27/30	27	27	30.4	34	
MIV-CAPG21(Bending)	PG21	10~18	28.3	12.5	33/36	33	33	37.1	46.5	
MIV-CA25(Bending)	M25x1,5	10~18	25	15	33/36	33	33	36.7	46.5	100
MIV-CA25-4P(Bending)		5.5 (4pores)	25	15	33/36	33	33	36.7	46.5	